


HEXA BLACK

Standard drill chuck with integrated shank and hexagonal key lock. Great quality at a fair price.


Features & benefits

- For use on CNC machines, for drilling, milling, reaming and tapping.
- Hexagonal key lock system.
- Permits clockwise and counterclockwise rotating.
- High gripping torque, exceeding 100 Nm. = 75 ft/lbs
- Maximum total integrated run-out of 0.05 mm. = .0019"
- Maximum revolutions per minute without balancing: 8000.

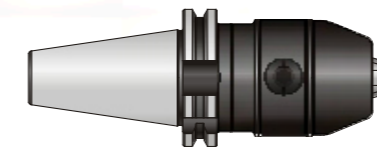


DIN-69871

Part No.	Model No.	Capacity		Mount K	Thru Coolant	Dimensions mm.			Weight gr.
		mm.	inches			Ø	L1	L2	
HB0134010	HB-13 ID-40	0,8-13	1/32"-1/2"	40	none	54	91	100	1920
HB0164010	HB-16 ID-40	3-16	1/8"-5/8"	40	none	57	94	101	2100

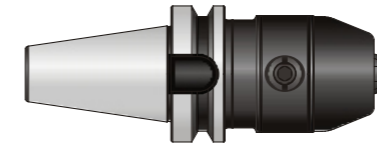

MAS-BT

Part No.	Model No.	Capacity		Mount K	Thru Coolant	Dimensions mm.			Weight gr.
		mm.	inches			Ø	L1	L2	
HB0134020	HB-13 BT-40	0,8-13	1/32"-1/2"	40	none	54	96	105	2040
HB0164020	HB-16 BT-40	3-16	1/8"-5/8"	40	none	57	99	106	2220

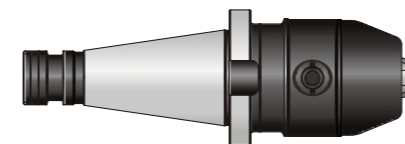

DIN-2080

Part No.	Model No.	Capacity		Mount K	Thru Coolant	Dimensions mm.			Weight gr.
		mm.	inches			Ø	L1	L2	
HB0134030	HB-13 DIN-40	0,8-13	1/32"-1/2"	40	none	54	82	91	1840
HB0164030	HB-16 DIN-40	3-16	1/8"-5/8"	40	none	57	85	92	2000

